



QUIN PRO
BIFACIAL MODULE

BSM720G12-66HNH
695-720
N-type SHINGLED

BLUESUN SOLAR CO.,LTD


Bluesun, founded in 2004, as a superior photovoltaic manufacturer, is devoted to the R&D and the production of crystalline silicon solar cells and modules for 17 years. The company has its sales areas spread all over more than 100 countries and regions in the world, and the cumulative historical shipments exceeded 12 GW.

PERFORMANCE WARRANTY

 Enhanced Product Warranty on Materials and Workmanship.

 Linear Power Performance Warranty*

 Annual Degradation Over 30 years no more than 0.4%

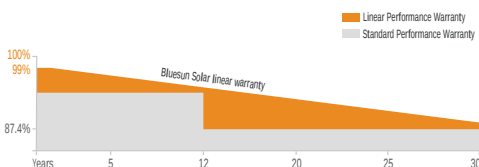

*According to the applicable Bluesun Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES

ISO 9001:2015 / Quality management system

ISO 14001:2015 / Standards for environmental

ISO 45001: 2018 / International standards for occupational health & safety

PRODUCT CERTIFICATES

IEC 61215 / IEC 61730 / CE / TUV



THE IDEAL SOLUTION FOR:



Rooftop arrays on residential buildings



Ground-mounted solar power plants



High module conversion efficiency

MBB Half Cell Technology, Module efficiency up to 23.18%



Withstanding harsh environment

Reliable quality leads to a better sustainability even in harsh environment like desert, farm and coastline



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control



Excellent weak light performance

More power output in weak light condition, such as cloudy, morning and sunset



Extended wind and snow load tests


Module certified to withstand extreme wind (2400 Pa) and snow loads (5400 Pa)

SPECIFICATIONS


Module Type	BSM695G12-66HNH	BSM700G12-66HNH	BSM705G12-66HNH	BSM710G12-66HNH	BSM715G12-66HNH	BSM720G12-66HNH
	STC	STC	STC	STC	STC	STC
Maximum Power (Pmax/W)	695	700	705	710	715	720
Operating Voltage (Vmp/V)	40.70	40.90	41.10	41.30	41.50	41.70
Operating Current (Imp/A)	17.08	17.11	17.15	17.19	17.23	17.27
Open-Circuit Voltage (Voc/V)	48.40	48.60	48.80	49.00	49.20	49.40
Short-Circuit Current (Isc/A)	18.15	18.19	18.23	18.27	18.31	18.35
Module Efficiency ηm(%)	22.37	22.53	22.70	22.86	23.02	23.18

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

I-V CURVE

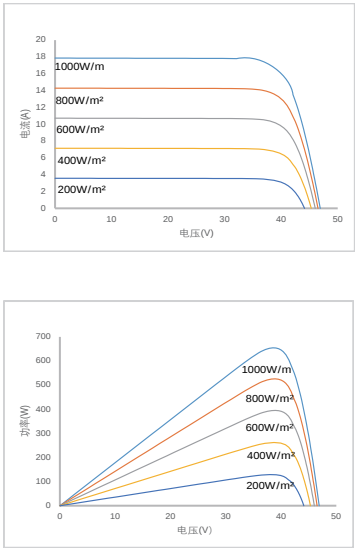

ENGINEERING DRAWINGS

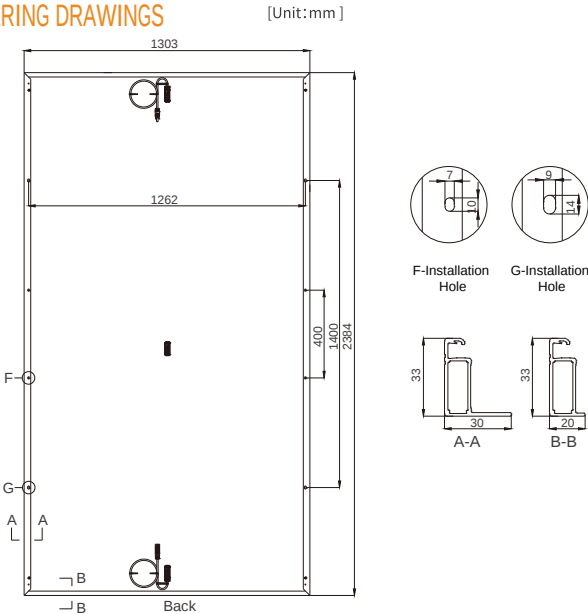

MECHANICAL SPECIFICATION

Cell Type	N-type
Cell Arrangement	408 (6*68)
Weight	37.6kg
Module Dimensions	2384*1303*33mm
Cable Length	+710mm, -790mm
Cable Cross Section Size	TUV: 4mm² (0.006inches²) /UL: 12AWG
Front Glass	2.0mm Heat Strengthened Glass
Rear Glass	2.0mm Heat Strengthened Glass
No. of Bypass Diodes	3
Packing Configuration	33pcs/carton, 594pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~ +85°C
Maximum Series Fuse	30A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Safety Class	II
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2

TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.34%/°C
Temperature Coefficient Voc	-0.27%/°C
Temperature Coefficient Isc	+0.04%/°C
NMOT	43±2°C

*Data contained in these specifications is subject to change without notice. Bluesun Solar reserves the right to final interpretation of content.